



NMHC2-10D




NMHC2-16S

Standard Specifications


Action		Double acting, Single acting
Fluid		Air
Operating pressure	Double acting	0.1~0.6MPa
	Single acting	0.25~0.6MPa
Ambient and fluid temperature		-10~60°C(Not frozen)
Max. operating frequency		180
Repeatability		±0.01
Lubrication		Not required
Auto switch (Option) ^{Note)}		Solid state auto switch (3-wire, 2-wire)

*如需要润滑，请用透平1号油ISO VG32。

Symbol

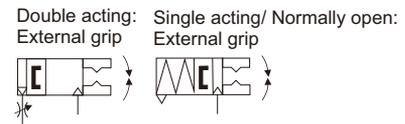

Standard Specifications

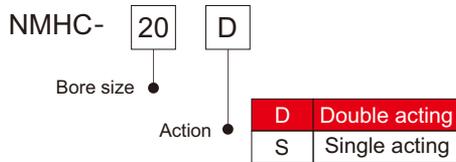


Action	Model	Bore size mm	Gripping moment (N·m) (Effective value) ^{Note1)}	Opening/closing angle (Both sides)	Weight (g) ^{Note2)}
Double acting	NMHC2-10D	10	0.10	30°~10°	39
	NMHC2-16D	16	0.39		90
	NMHC2-20D	20	0.70		180
	NMHC2-25D	25	1.36		311
Single acting	NMHC2-10S	10	0.070	30°~10°	39
	NMHC2-16S	16	0.31		92
	NMHC2-20S	20	0.54		183
	NMHC2-25S	25	1.08		316

Note1) At the pressure of 0.5 MPa.
Note2) Except auto switch.


Dimensions

NMHC2-10□ Double acting

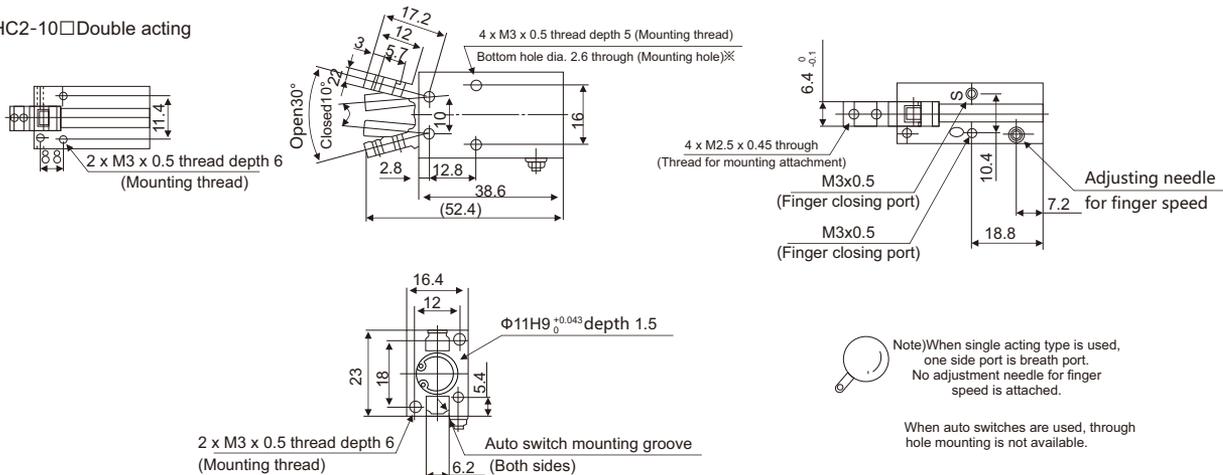


Dimensions

NMHC2-16 □ Double acting

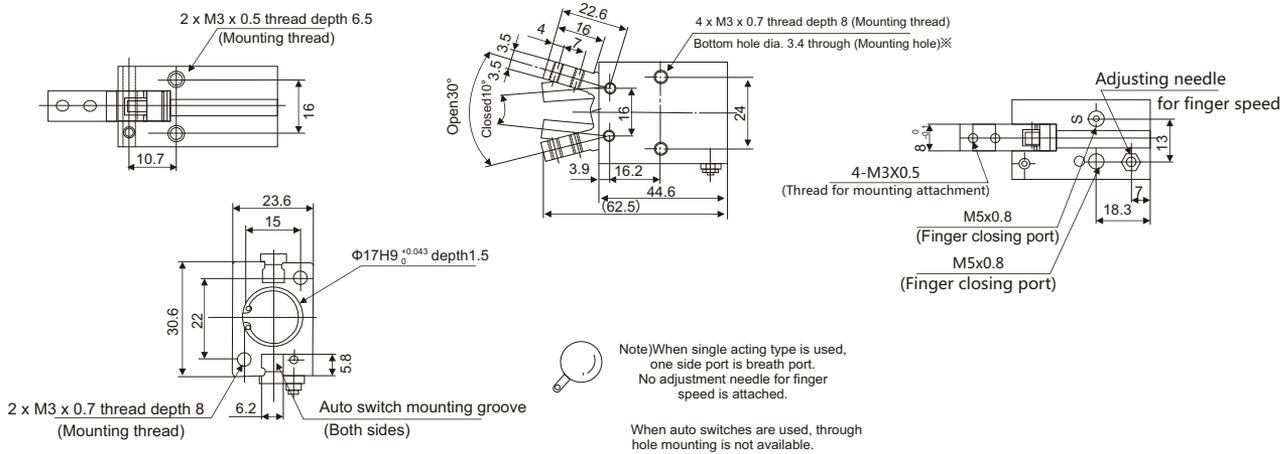

NMHC2-20 □ Double acting

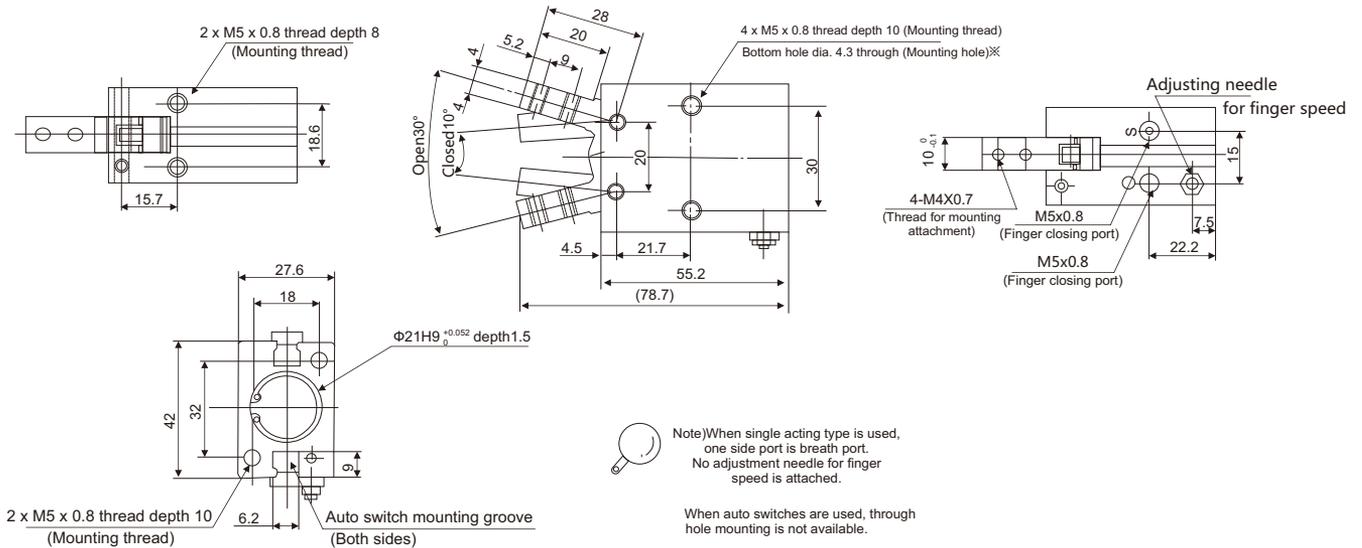

NMHC2-25 □ Double acting

