




### Symbol

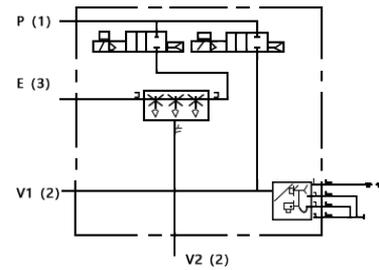

### Specifications

Model	Nozzle Size	Supply Power	Max. Vacuum	Exhaust	Consumption	Pressure Range	Temperature	Fuild
NZK2B	1.5mm	0.55bar	-92kPa	60L/min	36L/min	1~7MPa	-10~60°C	Air

### Model

NZK2 B 15 K 5 F A L A - 06 - K

#### Body

Type	Body	Exhaust Type
B	Single	Exhaust
G		silencer

#### Nozzle Size

Type	Nozzle Size
15	ø1.5

#### Supply, Exhaust Valve

Type	Supply (N.C.)	Exhaust(N.C.)
K	●	●
J	●	None
N	None	None

#### Supply Power

Type	Voltage
5	DC24V
6	DC12V

#### Pressure Range

Type	Switch Pressure range
N	None
A	0~-101kPa
F	-100~100kPa
I	-100 1000kPa

#### Option

Type	Content
None	None
K	Screw knife

#### Vacuum Output

Type	Vacuum Output
01	G1/8
L02	Bottom G1/4
06	ø6
08	ø8
L06	Bottom ø6
L08	Bottom ø8

#### Cable Connector

Type	Valve	Switch
L	●	●
L1	None	●
L2	●	None
L3	None	None

#### Switch

Type	Switch Output Type
N	One way NPN
P	One way PNP
A	Two way NPN
B	Two way PNP
C	One way NPN + 1-5V
D	One way NPN + 4-20mA
E	One way PNP + 1-5V
F	One way PNP + 4-20mA
R	Two way NPN + 1-5V
S	Two way NPN + 4-20mA
T	Two way PNP + 1-5V
V	Two way PNP + 4-20mA

Size(mm)

